


MISHIMOTO

INSTALLATION STEPS:

1. ATTACH THE MM10229-02 FOOT AND MM10229-05 THREADED FOOT TO THE MM10229-01 BRACKET USING TWO OF THE SUPPLIED B6X1.0-16A BOLTS. THE MM10229-05 SHOULD BE ATTACHED TO THE SLOTTED SIDE AND SHOULD BE LEFT LOOSE ENOUGH TO SLIDE. TIGHTEN AND TORQUE THE MM10229-02 TO THE RECOMMENDED VALUE IN THE MIDDLE THREADED HOLE.
2. FIND AN AREA OF THE GRILL THAT YOU WOULD LIKE TO ATTACH THE LICENSE PLATE TO. ENSURE THAT ONCE INSTALLED, THE PLATE WILL NOT BLOCK ANY SENSORS OR EXCESSIVE AIRFLOW.
3. ENSURING THAT THE FIXED SIDE IS SEATED INTO THE GRILL PATTERN, SLIDE THE LOOSE FOOT UNTIL IT IS ALSO SEATED INTO THE GRILL PATTERN. WHILE HOLDING THE FOOT INTO PLACE, TIGHTEN AND THEN TORQUE THE BOLT.
4. GENTLY PULL ON THE INSTALLED BRACKET TO CONFIRM THAT IT IS SECURED FIRMLY IN PLACE AND THAT IT WILL NOT FALL OFF.
5. INSTALL THE MM10229-03 PLATE BRACKET ONTO THE BRACKET USING TWO OF THE SUPPLIED BF6X1.0-10 BOLTS. YOU CAN USE THE SLOTS IN THE BRACKET PROVIDE ADDITIONAL ADJUSTMENT. TORQUE THE BOLTS TO THE RECOMMENDED VALUE.
6. INSTALL THE LICENSE PLATE AND MM1625 FRAME TO MM10229-03 UTILIZING THE REMAINING FOUR SUPPLIED BF6X1.0-10 BOLTS.

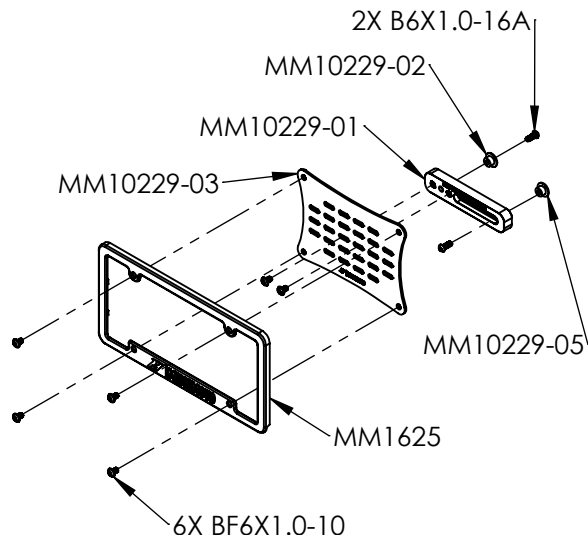

BILL OF MATERIALS

PART NUMBER	DESCRIPTION	QTY.
MM10229-01	BRACKET ASSEMBLY	1
MM10229-02	FOOT	1
MM10229-03	PLATE BRACKET	1
MM10229-04	NOTECARD	1
MM10229-05	THREADED FOOT	1
MM1625	PLATE FRAME	1
B6X1.0-16A	BOLT	2
BF6X1.0-10	BUTTON HEAD BOLT	6

FOR QUESTIONS OR ASSISTANCE WITH YOUR MISHIMOTO PRODUCT,
CONTACT US AT 1.877.GOMISHI OR SUPPORT@MISHIMOTO.COM