



## FEL-PRO INSTALLATION TIPS

Fel-Pro products are the result of exhaustive research and strict quality control. However, no sealing product is better than the quality of its installation.

### VALVE COVER GASKET



To effectively seal this sophisticated engine application, FEL-PRO has included PERMA-DRY® molded rubber gasket(s) in this set.

**CLEAN MATING SURFACES** of all foreign material including old gaskets, RTV and oil. You may wish to use a degreaser. Also, clean oil return holes.

**CHECK COVER FLANGES** for flatness. Straighten stamped metal covers. Replace if severely distorted. Distorted cast aluminum or plastic covers are difficult to straighten and should be replaced.


**ATTACH AND ALIGN GASKET TO PAN.**

---

**IMPORTANT:** This molded rubber silicone gasket must be installed **DRY** without any chemical adhesive.

---

-continued-

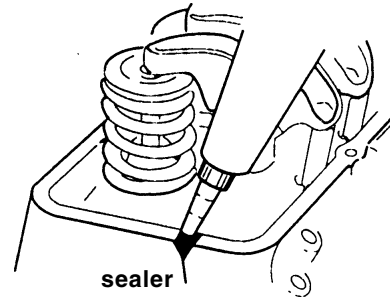

**PRIOR TO INSTALLING VALVE COVER** apply a small dab of silicone sealer where all gaskets and seal(s) meet.

**IMMEDIATELY PROCEED** to the next step, as sealer normally sets up in 10-15 minutes.

**REINSTALL VALVE COVER TO ENGINE.** Torque securely to OEM specifications. Over-torquing can distort cover and cause leakage.

**TEST RUN ENGINE.** Check all mating areas thoroughly to determine that all seals hold during operation.

© 2007 Federal Mogul Incorporated  
Form No. I-1570 (Rev. 10/92)

Printed in U.S.A.



## FEL-PRO INSTALLATION TIPS

Fel-Pro products are the result of exhaustive research and strict quality control. However, no sealing product is better than the quality of its installation.

### VALVE COVER GASKET



To effectively seal this sophisticated engine application, FEL-PRO has included PERMA-DRY® molded rubber gasket(s) in this set.

**CLEAN MATING SURFACES** of all foreign material including old gaskets, RTV and oil. You may wish to use a degreaser. Also, clean oil return holes.

**CHECK COVER FLANGES** for flatness. Straighten stamped metal covers. Replace if severely distorted. Distorted cast aluminum or plastic covers are difficult to straighten and should be replaced.


**ATTACH AND ALIGN GASKET TO PAN.**

---

**IMPORTANT:** This molded rubber silicone gasket must be installed **DRY** without any chemical adhesive.

---

-continued-

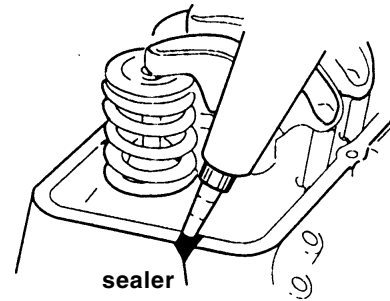

**PRIOR TO INSTALLING VALVE COVER** apply a small dab of silicone sealer where all gaskets and seal(s) meet.

**IMMEDIATELY PROCEED** to the next step, as sealer normally sets up in 10-15 minutes.

**REINSTALL VALVE COVER TO ENGINE.** Torque securely to OEM specifications. Over-torquing can distort cover and cause leakage.

**TEST RUN ENGINE.** Check all mating areas thoroughly to determine that all seals hold during operation.

© 2007 Federal Mogul Incorporated  
Form No. I-1570 (Rev. 10/92)

Printed in U.S.A.



## FEL-PRO INSTALLATION TIPS

Fel-Pro products are the result of exhaustive research and strict quality control. However, no sealing product is better than the quality of its installation.

### VALVE COVER GASKET



To effectively seal this sophisticated engine application, FEL-PRO has included PERMA-DRY® molded rubber gasket(s) in this set.

**CLEAN MATING SURFACES** of all foreign material including old gaskets, RTV and oil. You may wish to use a degreaser. Also, clean oil return holes.

**CHECK COVER FLANGES** for flatness. Straighten stamped metal covers. Replace if severely distorted. Distorted cast aluminum or plastic covers are difficult to straighten and should be replaced.


**ATTACH AND ALIGN GASKET TO PAN.**

---

**IMPORTANT:** This molded rubber silicone gasket must be installed **DRY** without ant chemical adhesive.

---

-continued-

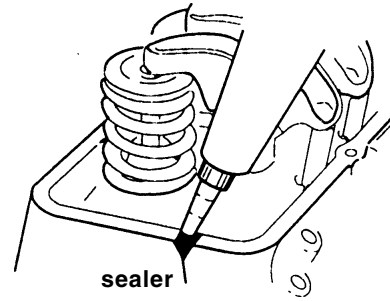

**PRIOR TO INSTALLING VALVE COVER** apply a small dab of silicone sealer where all gaskets and seal(s) meet.

**IMMEDIATELY PROCEED** to the next step, as sealer normally sets up in 10-15 minutes.

**REINSTALL VALVE COVER TO ENGINE.** Torque securely to OEM specifications. Over-torquing can distort cover and cause leakage.

**TEST RUN ENGINE.** Check all mating areas thoroughly to determine that all seals hold during operation.

© 2007 Federal Mogul Incorporated  
Form No. I-1570 (Rev. 10/92)

Printed in U.S.A.



## FEL-PRO INSTALLATION TIPS

Fel-Pro products are the result of exhaustive research and strict quality control. However, no sealing product is better than the quality of its installation.

### VALVE COVER GASKET



To effectively seal this sophisticated engine application, FEL-PRO has included PERMA-DRY® molded rubber gasket(s) in this set.

**CLEAN MATING SURFACES** of all foreign material including old gaskets, RTV and oil. You may wish to use a degreaser. Also, clean oil return holes.

**CHECK COVER FLANGES** for flatness. Straighten stamped metal covers. Replace if severely distorted. Distorted cast aluminum or plastic covers are difficult to straighten and should be replaced.


**ATTACH AND ALIGN GASKET TO PAN.**

---

**IMPORTANT:** This molded rubber silicone gasket must be installed **DRY** without ant chemical adhesive.

---

-continued-

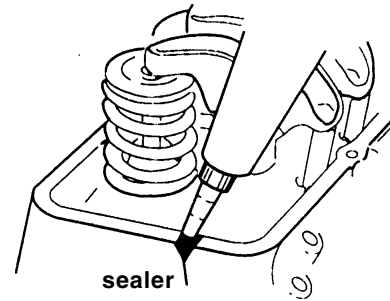

**PRIOR TO INSTALLING VALVE COVER** apply a small dab of silicone sealer where all gaskets and seal(s) meet.

**IMMEDIATELY PROCEED** to the next step, as sealer normally sets up in 10-15 minutes.

**REINSTALL VALVE COVER TO ENGINE.** Torque securely to OEM specifications. Over-torquing can distort cover and cause leakage.

**TEST RUN ENGINE.** Check all mating areas thoroughly to determine that all seals hold during operation.

© 2007 Federal Mogul Incorporated  
Form No. I-1570 (Rev. 10/92)

Printed in U.S.A.