




FEL-PRO INSTALLATION TIPS

Please make sure to clean the surface of the tensioner, removing any old silicone before installing the gasket.

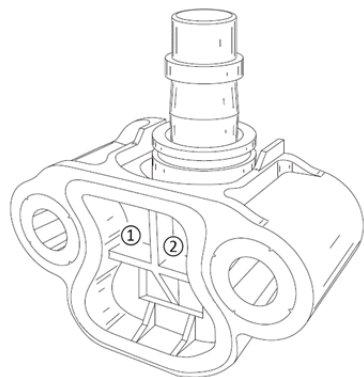

Install the gasket by pressing in the two rubber blocks into the upper left and right cross-member of the tensioner body ((1) & (2)). Use the included clip to compress the tensioner plunger before mounting tensioner on engine. Remove clip once tensioner, timing chain are installed. Gasket must be used with OEM replacement timing chain tensioner ONLY.


© 2018 Federal-Mogul Motorparts
Form No. I-2136 (Rev. 6/20)

Printed in U.S.A.



FEL-PRO INSTALLATION TIPS

Please make sure to clean the surface of the tensioner, removing any old silicone before installing the gasket.

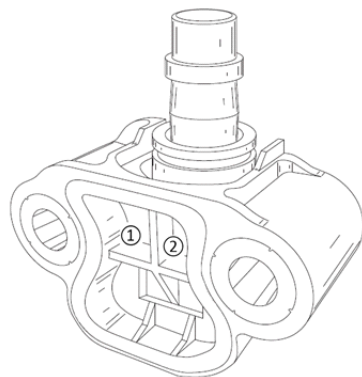

Install the gasket by pressing in the two rubber blocks into the upper left and right cross-member of the tensioner body ((1) & (2)). Use the included clip to compress the tensioner plunger before mounting tensioner on engine. Remove clip once tensioner, timing chain are installed. Gasket must be used with OEM replacement timing chain tensioner ONLY.


© 2018 Federal-Mogul Motorparts
Form No. I-2136 (Rev. 6/20)

Printed in U.S.A.



FEL-PRO INSTALLATION TIPS

Please make sure to clean the surface of the tensioner, removing any old silicone before installing the gasket.

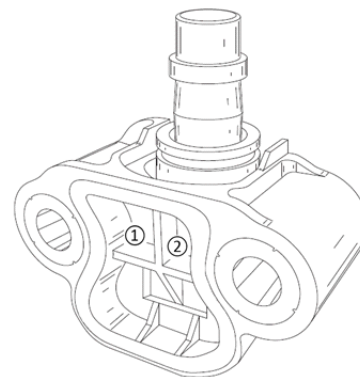

Install the gasket by pressing in the two rubber blocks into the upper left and right cross-member of the tensioner body ((1) & (2)). Use the included clip to compress the tensioner plunger before mounting tensioner on engine. Remove clip once tensioner, timing chain are installed. Gasket must be used with OEM replacement timing chain tensioner ONLY.


© 2018 Federal-Mogul Motorparts
Form No. I-2136 (Rev. 6/20)

Printed in U.S.A.



FEL-PRO INSTALLATION TIPS

Please make sure to clean the surface of the tensioner, removing any old silicone before installing the gasket.

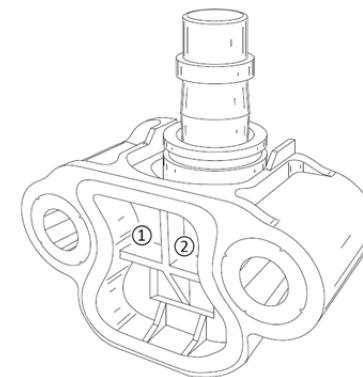

Install the gasket by pressing in the two rubber blocks into the upper left and right cross-member of the tensioner body ((1) & (2)). Use the included clip to compress the tensioner plunger before mounting tensioner on engine. Remove clip once tensioner, timing chain are installed. Gasket must be used with OEM replacement timing chain tensioner ONLY.


© 2018 Federal-Mogul Motorparts
Form No. I-2136 (Rev. 6/20)

Printed in U.S.A.



FEL-PRO INSTALLATION TIPS

Please make sure to clean the surface of the tensioner, removing any old silicone before installing the gasket.

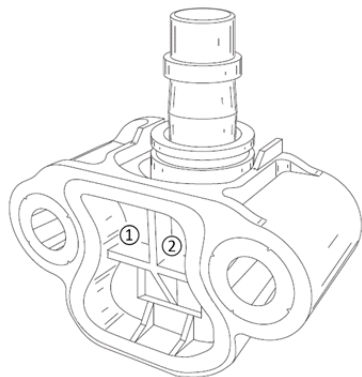

Install the gasket by pressing in the two rubber blocks into the upper left and right cross-member of the tensioner body ((1) & (2)). Use the included clip to compress the tensioner plunger before mounting tensioner on engine. Remove clip once tensioner, timing chain are installed. Gasket must be used with OEM replacement timing chain tensioner ONLY.


© 2018 Federal-Mogul Motorparts
Form No. I-2136 (Rev. 6/20)

Printed in U.S.A.



FEL-PRO INSTALLATION TIPS

Please make sure to clean the surface of the tensioner, removing any old silicone before installing the gasket.

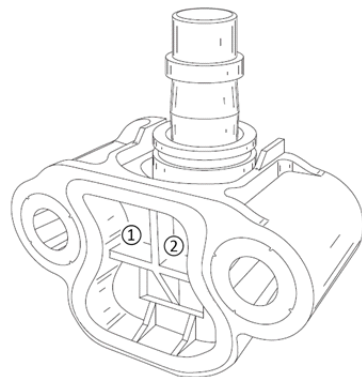

Install the gasket by pressing in the two rubber blocks into the upper left and right cross-member of the tensioner body ((1) & (2)). Use the included clip to compress the tensioner plunger before mounting tensioner on engine. Remove clip once tensioner, timing chain are installed. Gasket must be used with OEM replacement timing chain tensioner ONLY.


© 2018 Federal-Mogul Motorparts
Form No. I-2136 (Rev. 6/20)

Printed in U.S.A.



FEL-PRO INSTALLATION TIPS

Please make sure to clean the surface of the tensioner, removing any old silicone before installing the gasket.

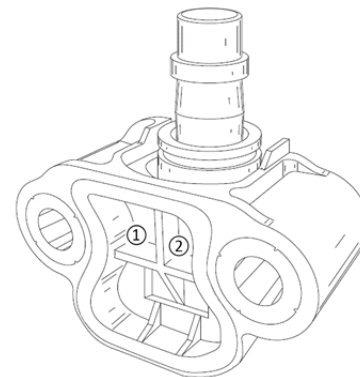

Install the gasket by pressing in the two rubber blocks into the upper left and right cross-member of the tensioner body ((1) & (2)). Use the included clip to compress the tensioner plunger before mounting tensioner on engine. Remove clip once tensioner, timing chain are installed. Gasket must be used with OEM replacement timing chain tensioner ONLY.


© 2018 Federal-Mogul Motorparts
Form No. I-2136 (Rev. 6/20)

Printed in U.S.A.



FEL-PRO INSTALLATION TIPS

Please make sure to clean the surface of the tensioner, removing any old silicone before installing the gasket.

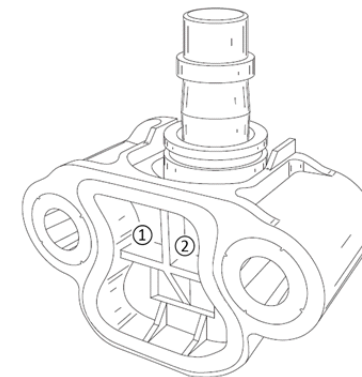

Install the gasket by pressing in the two rubber blocks into the upper left and right cross-member of the tensioner body ((1) & (2)). Use the included clip to compress the tensioner plunger before mounting tensioner on engine. Remove clip once tensioner, timing chain are installed. Gasket must be used with OEM replacement timing chain tensioner ONLY.

© 2018 Federal-Mogul Motorparts
Form No. I-2136 (Rev. 6/20)

Printed in U.S.A.