



Installation Instructions

Front Bolt-On/Rugged Look Fender Flares

Chevy Silverado 1500 (19-On) FF959

Important: Please read instructions entirely before installing this product.

Hardware Included	QTY
Extrusion	36ft
U CLIP .6mm	6
Large CLIP .9mm	4
Black Spacer	2

Hardware Included	QTY
Alcohol Towelette	4
Abrasive resistant tape	4
Speed nut	2

Bolt Kit Included	QTY
Nuts	44
Torx drive Bolts	44

Ensure that both left and right hand Fender Flares suit the profile of the vehicle. Note the areas where the Fender Flares come in contact with the vehicle. NOTE: Before fitting Fender Flares remove any moldings, strips or existing flares from the wheel arch. If there is a body side molding, mark where the molding is to be cut, alternatively the Fender Flare can be cut to go around the molding. Be sure to allow enough room for the extrusion. **No drilling of vehicle is required for Trox drive bolts and nuts.**



STEP 1: Attach the bolts and nuts to each Fender Flare using a 3/16" Allen key/Trox and a 1/2" wrench/socket. (wrench /socket and Allen key not supplied). Ensure inside of Fender Flares where the rubber seal is attached is clean, using the alcohol wipes provided. Wipe away any residue with a dry clean cloth.



STEP 2: Attach the included rubber seal to the Fender Flares. Peel back 2" of the adhesive backing and position on the Fender Flare. Attach the seal to the Fender Flare, peeling back a few inches at a time. Ensure pressure is used to secure rubber seal to Fender Flare edge. Attach rubber seal along all areas the Fender Flare will make contact with the vehicle body.



Installation Instructions Front Bolt-On/Rugged Look Fender Flares Chevy Silverado 1500 (19-On) FF959




STEP 3: Trim excess rubber seal and discard.



STEP 4: Clean the body areas where the Fender Flares will make contact. Ensure fenders are dry prior to install. Turn tires outward for Fender Flare installation.



STEP 5: For models with front factory mud guards, remove using #15 Torx head screwdriver at the upper and lower screw locations from the front factory mudguards and M10 socket at the underside location indicated above, maintain #15 Torx head screws for re-install. Retain factory mudguards for later use if required, fender flares require the mud guards to be removed.

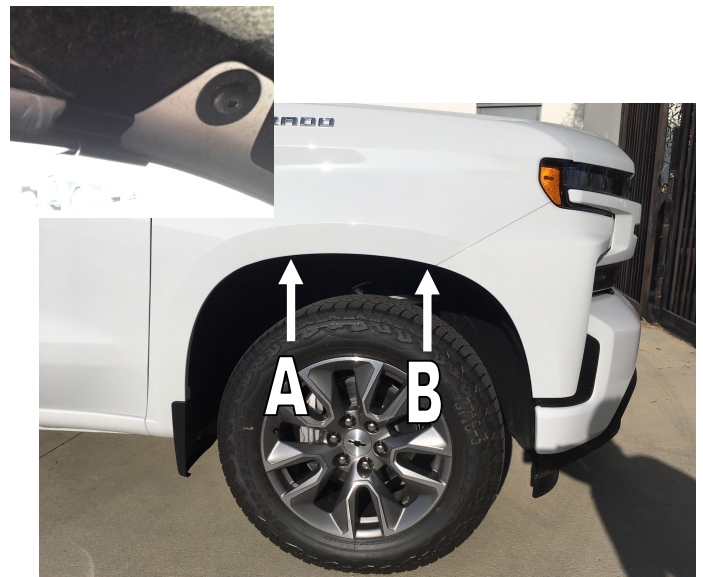

STEP 6: Place Fender Flare on the vehicle into the position of best fit. Note where the slots in Fender Flare at positions **A**, **B** and vehicle wheel arch. Remove Fender Flare. Place the small abrasive resistant tapes over the fender lip at the noted positions **A**, **B**. Slide the large clips over the inner fender panel at the noted **A**, **B** positions, ensure the hook on the back of the clip engages over the fender lip.



Installation Instructions **Front Bolt-On/Rugged Look Fender Flares** **Chevy Silverado 1500 (19-On) FF959**



STEP 7: Place Fender Flare on the vehicle into the position of best fit. Peel back 2 inches of the red tape liner on the fender flare extrusion at both ends, ensure liner is on the outside of part ref to step 9. Using #15 Torx head screwdriver re-install previously removed factory mudguard screws at the upper and lower screw locations through the slots in the Fender Flare at the two noted locations. At the noted **A, B** positions secure the Fender Flare to the wheel arch by ensuring the notch in clip locates securely into the slot in the Fender Flare.

STEP 8: Install the speed nut over the inner bumper panel at the slot location in the front of the fender flare. Align the slot in the fender flare over the hole in the speed nut. Mark this location on the inner bumper panel with a grease pencil. Use a 1/4 " drill bit to drill the bumper panel at the previously marked location. Install the speed nut over the drilled hole location flat side facing the wheel well. Slide the spacer between the inner side of the fender flare large flat side facing the wheel well centered over the hole in the speed nut. Install one of the factory screws removed from **step 5** through the slot in the fender flare, spacer and into the hole in the speed nut. Apply inward pressure on fastening point and tighten screw, ensure the screw engages through both sides of the speed nut.



STEP 9: Starting at the front of the Fender Flare, carefully remove tape liner from extrusion a few inches at a time. Ensure extrusion is not tucking into flare and sits flush neatly against the fender body. Apply forward pressure to adhere the extrusion along the edge of entire length of Fender Flare once extrusion liner is removed. Ensure all fixing points are tight and secure and that the extrusion is flush neatly against the vehicle body. Repeat install steps for the opposite side.



Installation Instructions

Front Bolt-On/Rugged Look Fender Flares

Chevy Silverado 1500 (19-On) FF959

REAR FENDER FLARE INSTALLATION



STEP 10: Attach the bolts and nuts to each Fender Flare using 3/16" Allen key/Trox and a 1/2" wrench/socket. (wrench /socket and Allen key not supplied). Ensure inside of Fender Flares where the rubber seal is attached is clean, using the alcohol wipes provided. Wipe away any residue with a dry clean cloth.



STEP 11: Attach the included extrusion to the Fender Flares. Peel back 2" of the adhesive backing and position on the Fender Flare. Attach the extrusion to the Fender Flare, peeling back a few inches at a time. Ensure pressure is used to secure extrusion to Fender Flare edge. Attach extrusion along all areas the Fender Flare will make contact with the vehicle body. Trim excess extrusion. Attach extrusion to the bottom front corner of Fender Flares per the attached image that will locate around the factory spat.



STEP 12: Clean the body areas where the Fender Flares will make contact. Ensure fenders are dry prior to install.




STEP 13: Using #15 Torx head screwdriver remove upper screw from the front factory spat in the rear wheel arch. Maintain screws for re-install.




Installation Instructions

Front Bolt-On/Rugged Look Fender Flares


Chevy Silverado 1500 (19-On) FF959

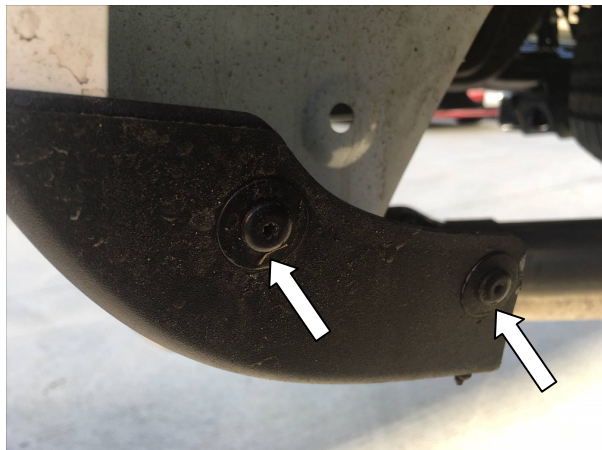

STEP 14: Using #15 Torx head screwdriver remove the two bottom screws from the rear factory spat. Maintain screws for re-install.

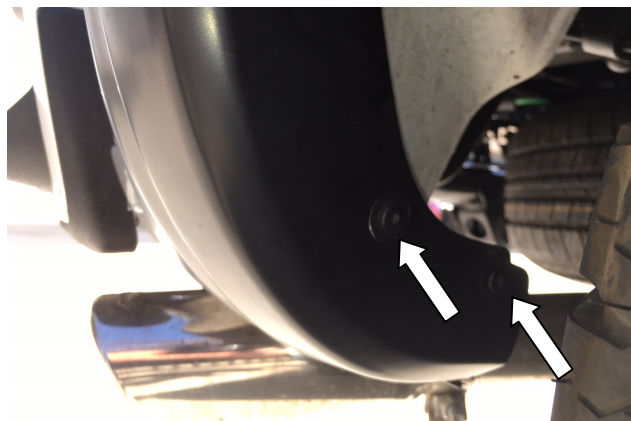

STEP 15: Place Fender Flare on the vehicle into the position of best fit. Note where the slots in Fender Flare align with the previously removed factory screws in the front and rear spats. Peel back 2 inches of the red tape liner on the fender flare extrusion at both ends, ensure liner is on the outside of part ref to step 18. Using #15 Torx head screwdriver re-install the upper and lower screws from the rear factory spat through the slots in the Fender Flare.

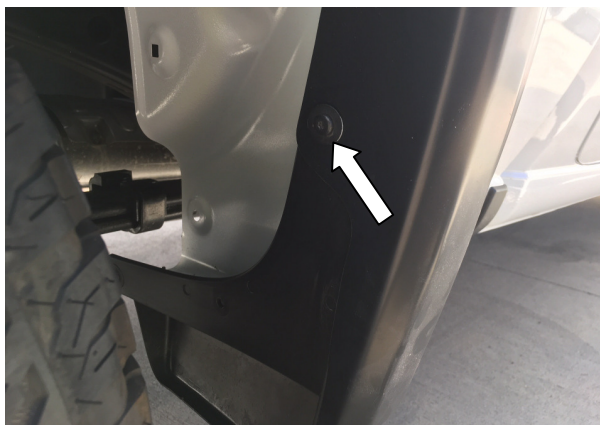

STEP 16: Using #15 Torx head screwdriver re-install the upper screw from the front factory spat in the rear wheel arch through the slot in the Fender flare.



Note: Inner sealant bead in wheel well.



STEP 17: To secure the Fender Flare to the body, apply upward tension on Fender Flare to the vehicle fender when installing the black metal clips. Slide the clips over the Fender Flare and the inner wheel arch lip in the three locations shown. Position the clip so that the barb in the clip locates in the slot of the Fender Flare. Ensure all fixing points are tight and secure and that the extrusion is flush neatly against the vehicle body. Repeat install steps for the opposite side.

Note: If sealant bead in the inner wheel lip prevents the clips from engaging the slot in the part, with a sharp utility knife cut away the mastic seal that corresponds to the noted clip locations. Cut width of clip and 10mm either side of the locations, to ensure enough sealant has been removed test clip to ensure this engages the slot in the part.



Installation Instructions

Front Bolt-On/Rugged Look Fender Flares

Chevy Silverado 1500 (19-On) FF959

RETURN INFORMATION

14 Day Return Policy

- We will accept returns within 14 days If you are not satisfied with your purchase or item was ordered incorrectly, buyers remorse, changed mind etcetera.
- Item must be unopened, and returned in the Items original packaging. No signs of being installed or installation attempted. Item must be unused,
- A 25% restocking fee will be applied
- Buyer is responsible for return shipping.
- If item is damaged during the return process, buyer is responsible for filing damage claim with freight company for reimbursement.

Shipping and Handling are not refundable.

WARRANTY INFORMATION

180 Day Limited Warranty

Warranty is for exchange only. No Refunds

All products come with a 180 day limited warranty against manufacturers defects

No exchange will be issued on products that have been damaged in any way.

If your item is damaged during shipping, please refer to return section.

All warranty claims require original proof of purchase and order number. No warranty claims will be processed without proof of purchase.