



1570 Lakeview Loop, Anaheim Ca 92870


714-630-2764 (Phone) : info@mcleodracing.com

Hydraulic Bearing/Slave Dimensional Sheet

T-5 / T-10, Super T-10 / Toploader /Muncie / Saginaw / TKO 500/600 TKX

Transmissions / Richmond 5&6 Speed / A833

This chart is to help determine the clearance you have between the tips of the fingers on the pressure plate and the face of the internal slave/hydraulic bearing. Before measuring, please make sure to have a precision measuring device that measure with at least .00 decimal place values. A tape measurer or ruler will NOT suffice for this exercise. A digital or dial caliper/veneer is the perfect tool for this exercise.

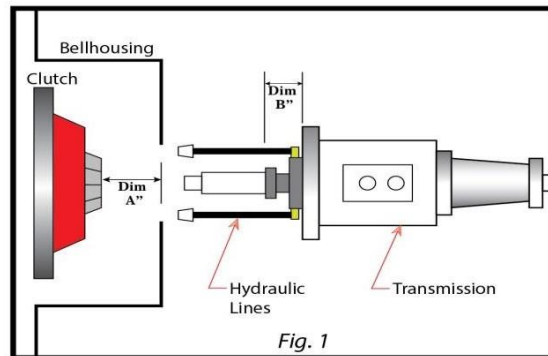

Measure and record your "A" dimension from the transmissions mounting surface (**Outside of Bellhousing**) to the tip of the pressure plate finger when clutch is fully installed and torqued down.

Write Dimension "A" Here _____

Measure and record your "B" dimension from the face of the bearing/slave to the mating surface of the transmission, with the bearing fully compressed before fluid is used.

Write Dimension "B" Here _____

Subtract Dim "A" (Top#) Minus Dim "B" (Bottom #) and your equation will be _____

You need a minimum .100" to a maximum .250" clearance.

These clearances only apply to 1300 & 1400 Series Bearing




1570 Lakeview Loop, Anaheim Ca 92870

714-630-2764 (Phone) : info@mcleodracing.com

Hydraulic Bearing/Slave Dimensional Sheet

1993-97 LT1 T-56 / 1998-02 LS1 T-56 / 2003-04 Cobra T-56 / Viper T-56 / GTO T-56

This chart is to help determine the clearance you have between the tips of the fingers on the pressure plate and the face of the internal slave/hydraulic bearing. Before measuring, please make sure to have a precision measuring device that measure with at least .00 decimal place values. A tape measurer or ruler will NOT suffice for this exercise. A digital or dial caliper/veneer is the perfect tool for this exercise.

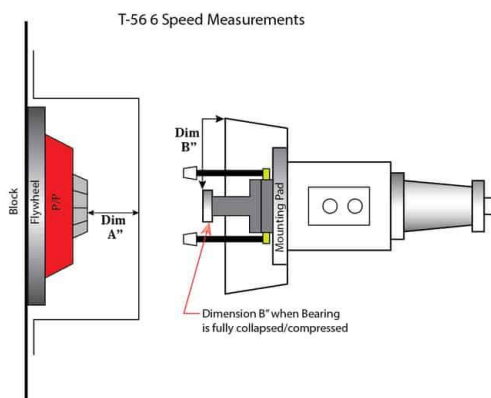

Measure and record your "A" dimension from the transmissions mounting surface (**Outside of Bellhousing**) to the tip of the pressure plate finger when clutch is fully installed and torqued down.

Write Dimension "A" Here _____

Measure and record your "B" dimension from the face of the bearing/slave to the mating surface of the transmission, with the bearing fully compressed before fluid is used.

Write Dimension "B" Here _____

Subtract Dim "A" (Top#) minus Dim "B" (Bottom#) and your equation will be _____

You need a minimum .100" to a maximum .250" clearance.

These clearances only apply to 1300 & 1400 Series Bearings.




1570 Lakeview Loop, Anaheim Ca 92870

714-630-2764 (Phone) : info@mcleodracing.com

Hydraulic Bearing/Slave Dimensional Sheet

T-45 / TR-3650 / TR-6060 / MT-82 and Transmissions with Integrated Bellhousings.

This chart is to help determine the clearance you have between the tips of the fingers on the pressure plate and the face of the internal slave/hydraulic bearing. Before measuring please make sure to have a precision measuring device that measure with at least .00 decimal place values. A tape measurer or ruler will NOT suffice for this exercise. A digital or dial caliper/veneer is the perfect tool for this exercise.

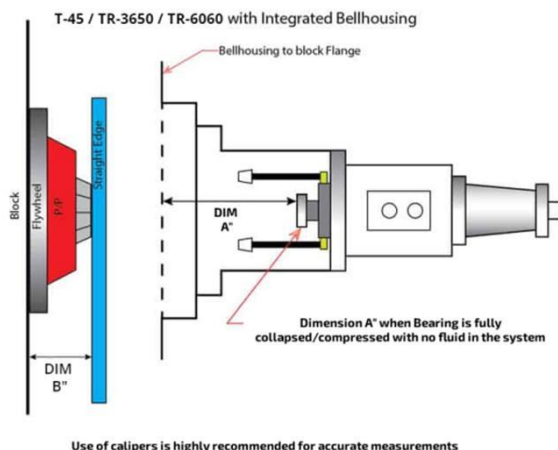

Measure and record your "A" dimension from the bellhousing flange that touches the engine block to the face of the hydraulic bearing/slave, when it is fully compressed in and no fluid is in the system.

Write Dimension "A" Here _____

Measure and record your "B" dimension from the engine block to the tips of the fingers on the pressure plate finger when clutch is fully installed and torqued down.

Write Dimension "B" Here _____

Subtract Dim "A" (Top#) minus Dim "B" (Bottom#) and your equation will be _____

You need a minimum .100" to a maximum .250" clearance.

These clearances only apply to 1300 & 1400 Series Bearings