


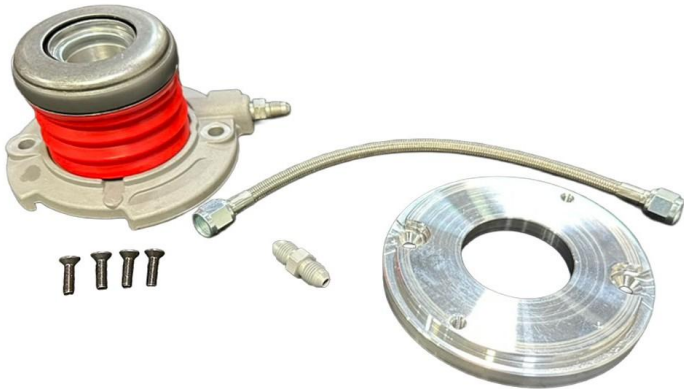

Parts List


- A. New fully hydraulic booted release bearing
- B. Aluminum bearing adapter
- C. (4) 6mm mounting screws
- D. Double male -4AN fitting
- E. -4 AN braided steel line

Installation Instructions

1. Install the bearing spacer with the M6 x1.00 screws. (Fig. #1)
2. Align the mounting holes in the location with the center mark at 12 o'clock position.
3. Torque to 84-inch lbs. or 7 ft/lbs.



Fig #1

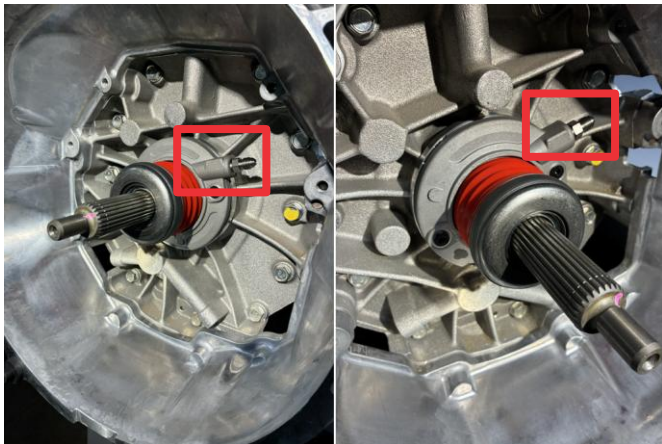

4. Install the release bearing with the M6 x 1.00 screws. (Fig #2)
5. Align the bearing so that the inlet fitting is positioned at the 2 o'clock position.
6. Torque to 84-inch lbs. or 7 ft/lbs.

Fig #2

7. Thread the supplied AN fitting to the line (Fig #3)



Fig #3

8. Feed the assembled line through the bellhousing opening.

9. Screw the fitting onto the bearing feed port to a tight fit. DO NOT OVERTIGHTEN. (Fig #4)

10. Align the feed line while tightening to face toward the rear of the transmission for later attachment to the master cylinder line. (Fig. #5)



Fig #4



Fig #5

Limited Warranty

McLeod Racing LLC, products are warranted to be free from defects in material and workmanship for the period of ninety (90) days, from the date of purchase. McLeod does not warrant or make any representations concerning its products when not installed and/or used strictly in accordance with the manufacturer's instructions for such; installation and operation, and in accordance with good installation and maintenance practices of the automotive industry. Products purchased used do not carry a warranty. This warranty is to the original purchaser and is non-transferable. McLeod Racing LLC will not be held liable for the labor charges and other intangible or consequent losses that might be claimed as a result of the failure of any part, nor shall it be liable for damages or injury to persons or property resulting from the misuse or improper installation of any part subject to this warranty. No merchandise may be returned for any reason unless prior return merchandise authorization number (RMA) has been obtained from McLeod. An RMA number may be obtained via www.mcleodracing.com or by calling McLeod directly. McLeod Racing LLC reserves the right to examine all parts returned for warranty claim to determine whether or not any such part has failed because of a defect in material or workmanship. McLeod's obligation under this warranty shall be limited to repairing, replacing or crediting, at its option, any part found to be defective. All products returned to McLeod for warranty inspection must be prepaid by the customer under this warranty. In a racing environment, the type of stress placed on automotive parts can vary dramatically by the type of use, driving style, track preparation, differing tire style and other variables that are out of McLeod's control. For this reason, any parts used in a racing environment shall be void of any warranty either expressed or implied. There are no other warranties, either expressed or implied including, but not limited to, warranty of merchantability, and warranty of fitness for a particular purpose which extend beyond those set forth in the preceding paragraphs. This warranty shall be interpreted and applied in accordance with California law.

For any changes or updated versions of the warrant described above, please refer to www.mcleodracing.com before installation of product.