

NOTE: It is important that all the areas where the bed cover mounts to the truck are clean and free of debris before installation.

PARTS INCLUDED IN YOUR KIT


- A** 1x Cover assembly
 - Bracket kit, if required.
- Vehicles listed to the right require no bracket kit. For all other vehicles, see below to find the bracket kit required for your vehicle.

PARTS THAT ARE INCLUDED IN YOUR BRACKET KIT, DEPEND ON YOUR VEHICLE

2020-Current GM Silverado/Sierra 5'8" Carbon Pro bed


22000007 Bracket Kit:

- B** 1x Driver front bracket
- C** 1x Passenger front bracket
- D** 1x Driver rear bracket
- E** 1x Passenger rear bracket
- F** 8x Screw
- G** 6x U-nut
- H** 2x Hole drill guide

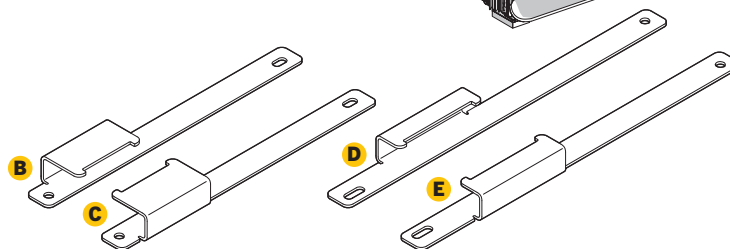

TOOLS REQUIRED


- Scissors or utility knife

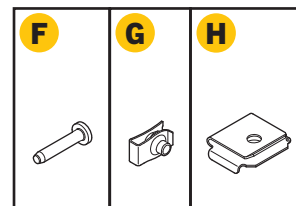

2019 Current GM Silverado/Sierra 5'8" bed

22000121 Bracket Kit:


- I** 1x Slide nut 3.75x1.0x.31"
- J** 2x Screws
- K** 1x 3/16 Hex key
- L** 1x Stake pocket bracket (*passenger side*)
- M** 1x Slide nut .625x.25x4.5"
- N** 2x Bolts
- O** 1x Clamp attach bracket (*driver side*)

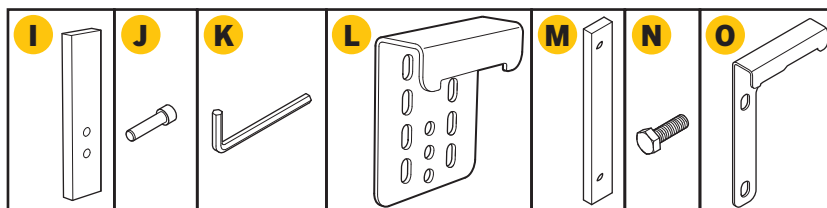

2014-2018 Chevy Silverado 5'8" 1500 bed & 2015-2022 Chevy Colorado 5.0" bed


22000128 Bracket Kit:

- P** 2x Slide nuts 3.75x1.0x.31"
- Q** 4x Screws
- R** 1x 3/16 Hex key
- S** 2x Stake pocket bracket

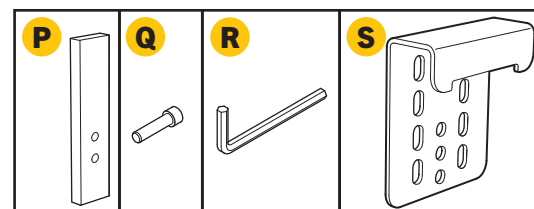

2023-Current Colorado/Canyon 5'0" bed, 22000150 Bracket Kit:

- T** 2x Flag nuts
- U** 2x Brackets
- V** 2x T-45 Pan head torx screws

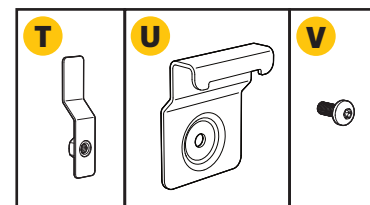

! IMPORTANT

READ BEFORE YOU BEGIN INSTALLATION

IT IS CRITICAL FOR YOUR SAFETY THAT YOU CAREFULLY READ AND FOLLOW THE SAFETY CAUTIONS AND INSTALLATION INSTRUCTIONS BOTH PRIOR TO AND DURING INSTALLATION.

USER SAFETY CAUTION

During installation, be mindful of the potential for sharp edges on the product or vehicle. Taking proper safety precautions helps ensure a safe and smooth installation process.

Always wear protective gloves and handle components with care to reduce the risk of injury.



TEMPERATURE SURFACE CAUTION

During high temperatures or extended sun exposure, surfaces of this product may become hot to the touch, posing a risk of burns or injury. Use caution when handling the product in hot weather and allow time for it to cool before contact.

Always check surface temperature before use to ensure safe handling conditions.



FASTENER TORQUE CAUTION

All fasteners must be tightened to the specified torque values provided in the installation instructions to ensure proper fit and safe operation of the tonneau cover. Under- or over-tightening can lead to product failure, potential damage to your vehicle, injury, or safety hazards while driving.

Always use a calibrated torque wrench and follow the specifications in the installation instructions.



PINCH POINT SAFETY CAUTION

This tonneau cover may create pinch points when closing or operating near solid surfaces such as the truck bed rails or tailgate. To prevent injury, keep hands, fingers, and other body parts clear of moving parts during operation.


Always operate the cover slowly and with caution to ensure safe and proper use.



ENTRAPMENT SAFETY WARNING

This tonneau cover does not feature a manual release mechanism from inside the truck bed. To prevent the risk of entrapment, never allow anyone to be inside the bed of the truck when the cover is closed.

Always ensure the area is clear before closing the cover, and keep the cover securely latched when not in use to avoid accidental closure.



COVER ATTACHMENT WARNING

A partially folded up or unsecured cover may detach during transit, risking vehicle or property damage and personal injury.


Always verify the tonneau cover is properly secured before operating the vehicle.



CARGO TRANSPORT WARNING

When transporting cargo that is taller than the truck bed, the cover must be fully folded open and securely fastened with both retainer straps. An unsecured cover can detach while driving, risking vehicle or property damage and personal injury.


Never operate the vehicle with a partially folded up cover.



COVER POSITION WARNING

Before operating the vehicle, always verify the tonneau cover is either fully folded open and secured with both buckles or fully folded closed and securely latched down.

Never operate the vehicle if the tonneau cover is not properly secured.

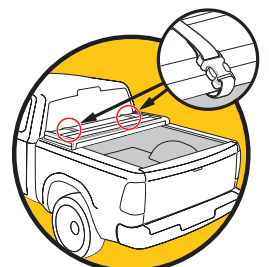

INSTALLATION STEPS

1 INSTALL BRACKET KIT IF REQUIRED

Please start with the installation instructions found in each bracket kit. If no bracket kit is required, start at step 2.


NO BRACKET KIT REQUIRED FOR:

- 14-18 Chevy Silverado 6.5' bed 1500
- 14-18 Chevy Silverado 8.0' bed 1500
- 15-19 GM Silverado/Sierra HD 6.5' bed
- 15-19 GM Silverado/Sierra HD 8.0' bed
- 2015+ Chevy Colorado 6.0' bed
- 2019+ GM Silverado/Sierra 6'6" bed
- 2019+ GM Silverado/Sierra 8.0' bed
- 2020+ GM HD Silverado/Sierra 6'7" bed
- 2020+ GM HD Silverado/Sierra 8' bed


BRACKET KIT REQUIRED FOR:

- 2020+ GM Silverado/Sierra 5'8" Carbon Pro bed
- Please refer to 31000021-30 Installation Sheet**
- 2019+ GM Silverado/Sierra 5'8" bed
- Please refer to 31920220-30 Installation Sheet**
- 2014-2018 Chevy Silverado 5'8" 1500 bed &
 - 2015-2022 Chevy Colorado 5.0" bed
- Please refer to 31920220-30 Installation Sheet**
- 2023+ Chevy Colorado/Canyon 5' bed
- Please refer to 31920150-30 Installation Sheet**


2 Place the assembled bed cover (A) over the cab end of the truck box.

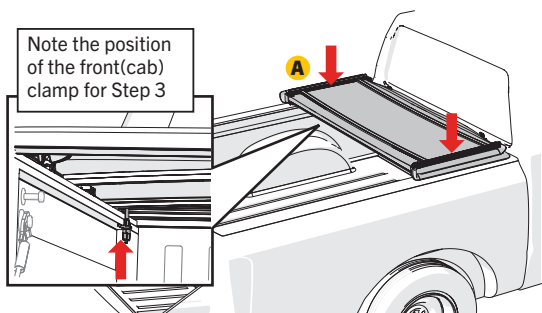


3 Unfold the cover (A) fully and adjust the position over the truck bed for proper cab and tail alignment.

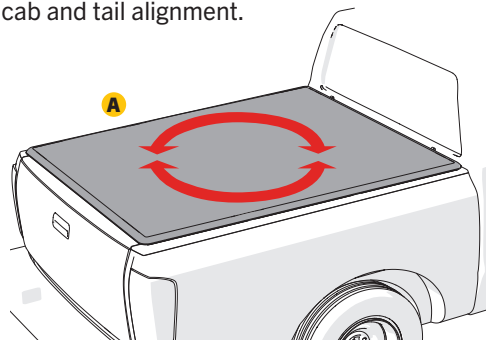



NOTE: For cover alignment, front to back, locate the second fin of the tailgate seal so that it sits on the inside edge of the tailgate cap.

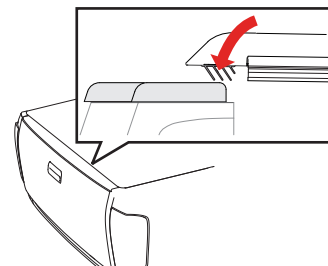



4 Unfold the cover (A) fully and adjust the position over the truck bed for proper cab and tail alignment.

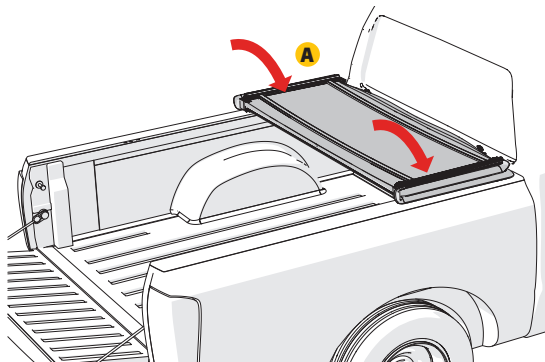


5 **STOP** If your truck has a plastic bed rail cap that extends below the truck sheet metal bed flange, you **MUST** remove enough of the plastic so that the clamps make solid contact with the truck's sheet metal. **!**

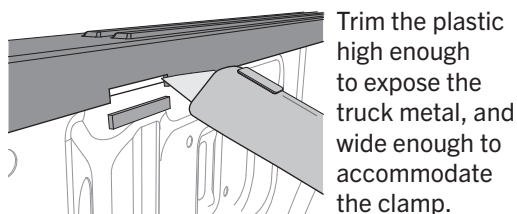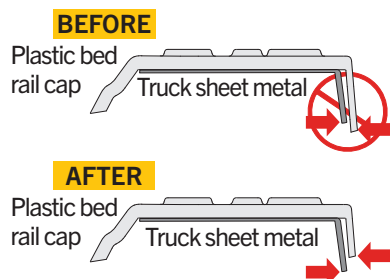


Do NOT cut into or scrape the truck bed.

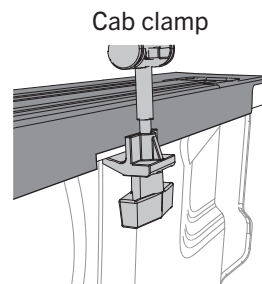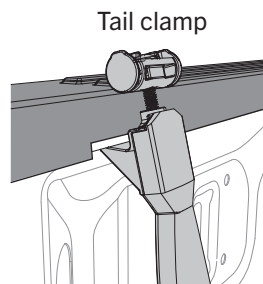


- 6** For 2020 GM Silverado/Sierra 5'8" Carbon Pro truck bed, please refer to step 9c. For all other vehicles, slide the front (cab) clamp to the truck bed side and hook the jaw under the metal truck bed rail. Hand-tighten the T-Handle until the jaw contacts the metal bed flange, then hand-tighten an additional 3 to 4 complete turns to properly secure the cover (A). Be sure to tighten the clamps on each side evenly. **DO NOT use a wrench or overtighten.** Overtightening can cause failure of the clamping system. Verify that the cover is correctly installed by pushing or pulling the cover to verify that it is secure. The bed cover is correctly installed when it cannot shift from its position.

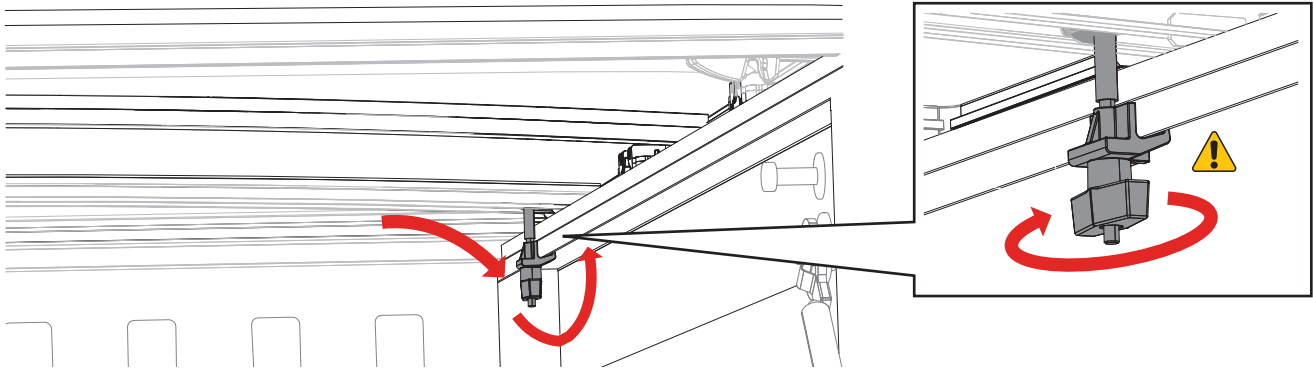


- 7** The tethers are attached to the front bow. Clip the hook onto the cargo tie-down of the truck bed. Do this for both the driver and passenger sides. 

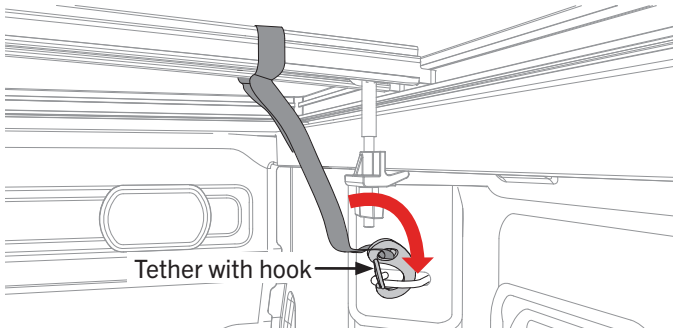


- 8** With the tailgate open and the front (cab) clamps secure, completely close the cover (A).

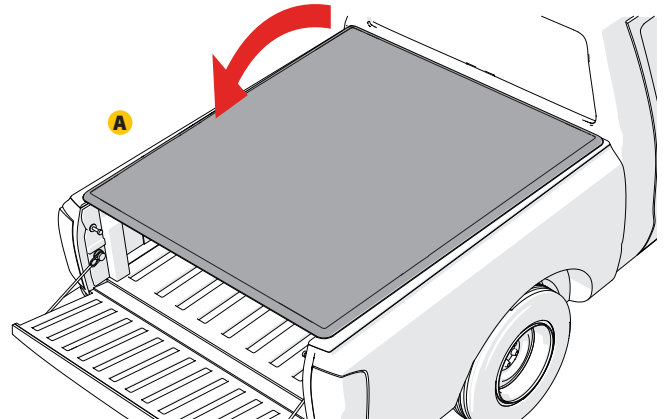


9a TRUCK BEDS WITH NO BRACKET KIT

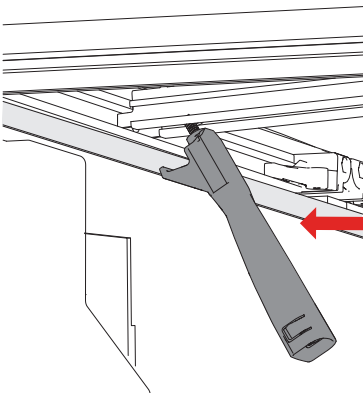


Slide the rear (tailgate) clamp to the metal bed rail.

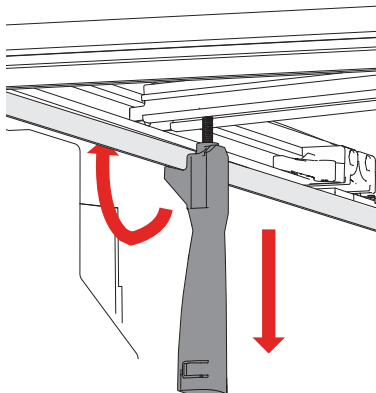


Pull down on the clamp while hooking under the bed rail.

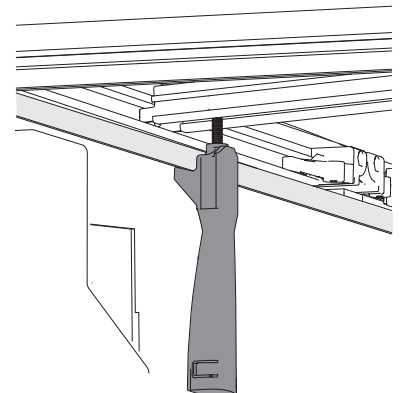


The spring loaded clamp should be latched firmly under the metal bed rail.

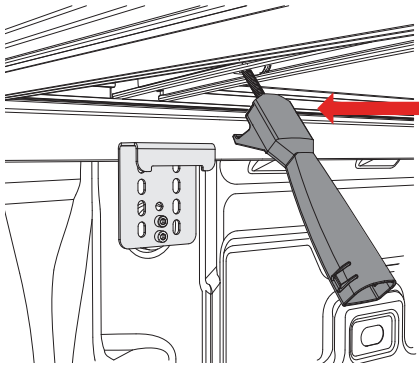9b**2014-2018 CHEVY SILVERADO 5'8"1500 TRUCK BED AND 2015-2022 CHEVY COLORADO 5' TRUCK BED**

Slide the rear (tailgate) clamp to the bracket.

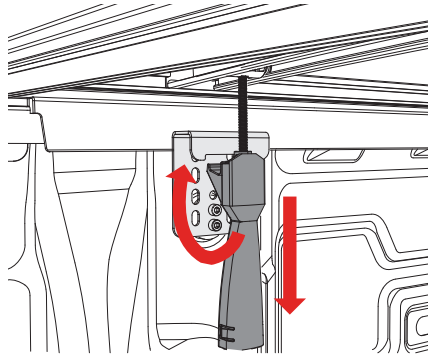



Pull down on the clamp while hooking under the bracket.

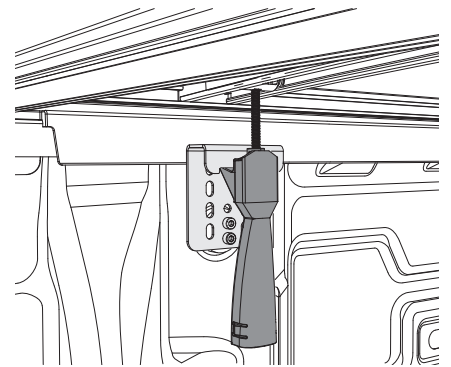


The spring loaded clamp should be latched firmly under the lip of the bracket.

9c**2020-CURRENT GM SILVERADO/SIERRA 5'8" CARBON PRO TRUCK BED**


Slide the front (cab) clamp to the bracket. Ensure that the clamp is positioned under the bracket. Hand-tighten until the clamp makes contact, then hand-tighten an additional 3 to 4 complete turns. **Do NOT use a wrench or overtighten.** Overtightening can cause failure to the clamping system. The bed cover is correctly installed when it cannot shift from its position. Verify the cover is correctly installed by pushing or pulling the cover with moderate force to verify it is secure.

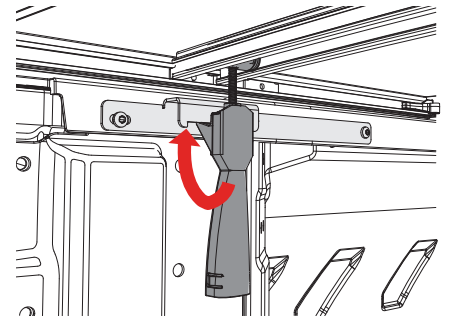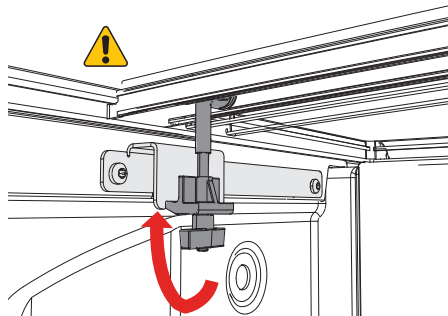


Slide the rear (tailgate) clamp to the bracket. Pull down on the clamp while hooking under the bracket. The spring loaded clamp should be latched firmly under the lip of the bracket.

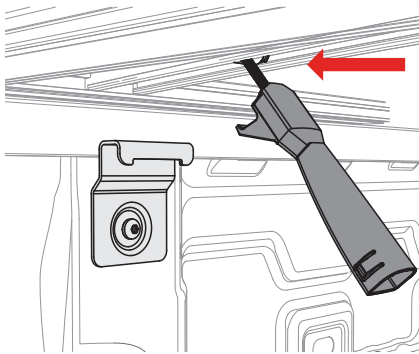9d**2023-CURRENT COLORADO/CANYON 5' TRUCK BED**

Slide the rear (tailgate) clamp to the bracket.

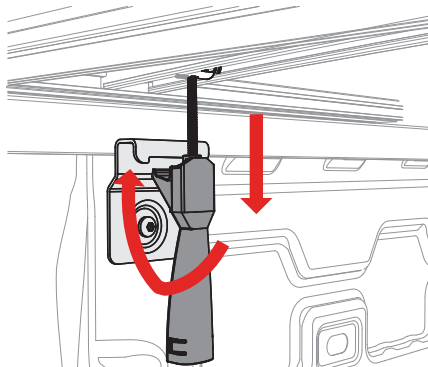


Pull down on the clamp while hooking under the bracket.

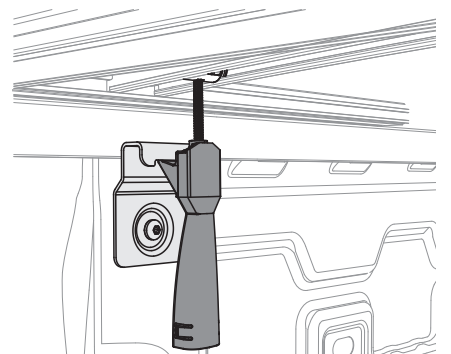

The spring loaded clamp should be latched firmly under the lip of the bracket.


Slide the rear (tailgate) clamp to the bracket. Pull down on the clamp while hooking under the bracket. The spring loaded clamp should be latched firmly under the lip of the bracket.

(Driver side)

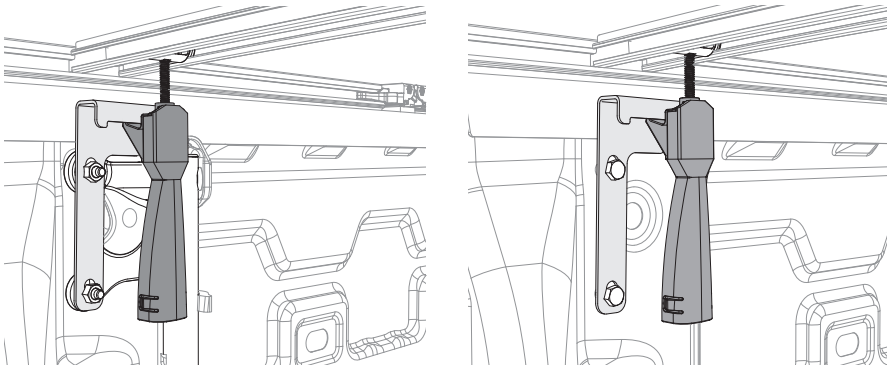

With assist handle


(Passenger side)

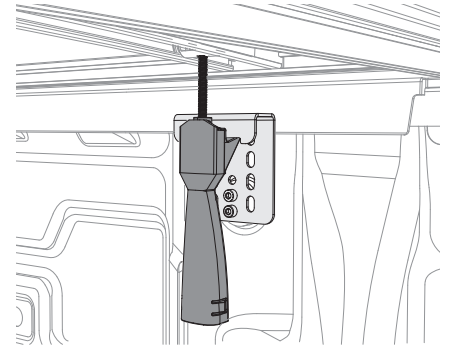


Without assist handle

DRIVING WITH THE TONNEAU OPEN


Release the rear clamps and fold the cover forward.

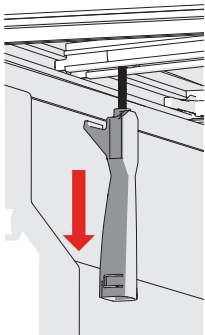

IMPORTANT: Before folding the second section of the cover (A), the rear clamps must be stowed into the rail to prevent damage to the fabric. **Failure to stow the handles will puncture the tarp and void the warranty.**

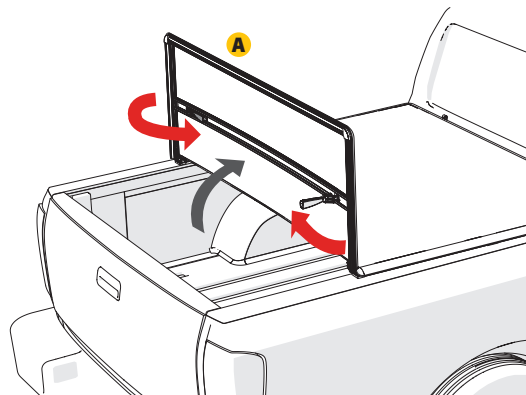

Fold the tonneau forward and fasten the straps in the middle section to the front rail. Check that the straps are tight. **Failure to do so could allow the wind to blow the cover back resulting in damage to the cover and truck.**

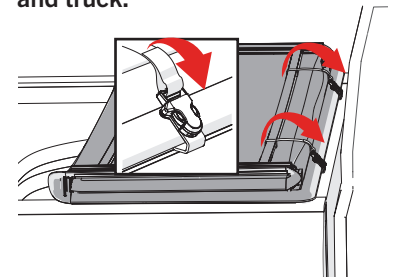

IMPORTANT

Re-tighten the front/cab clamps and tethers after the first week of driving the vehicle. Also periodically check the clamps and tethers to ensure they are secure.

Closed/Extended Position – Bed cover must be completely secured by all four (4) clamps.

Open/Folded Position – Bed cover must be completely folded up (all panels) and secured at the cab with the provided buckles straps and with both tethers attached.


Do NOT drive with the bed cover in a partially open position.



Do NOT allow the vehicle to be towed backwards without first removing the cover from the vehicle.



Remove any snow or foreign matter before folding the bed cover.

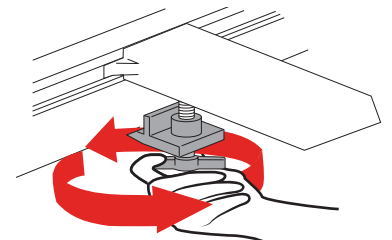

CARE AND MAINTENANCE

The truck bed cover requires occasional cleaning with mild automotive soap and water only. Avoid using abrasive cleaners as they may dull the finish. The cover can be treated with any vinyl protectant specifically made for tonneau covers.

CAUTION

Always read the ingredients of any product you are using to clean your truck bed cover. Do not use conditioners that contain silicone or petroleum.



Periodically check that the cover is securely attached to your truck bed and working as intended. Inspect the front and rear clamps. If applicable, inspect latches and mounting hardware to ensure they are properly installed and have not come loose during operation. Covers that are used frequently or are subject to vibrations and impacts from rough roadways may require adjustment.



SAFETY INSTRUCTIONS

- DO NOT place objects on or against cover or framework.
- DO NOT tie cargo to truck bed cover or framework.
- DO NOT operate vehicle with objects on top of the cover.
- NEVER allow children or pets to occupy the truck bed with the cover in the fully closed position.
- The cover is not airtight. Special care is required to keep cargo clean and dry.
- Truck bed covers will not prevent theft of contents inside the truck bed.
- DO NOT drive with the bed cover in a partially open position.

LIMITED WARRANTY

Thank you for purchasing a RealTruck Trifecta Max truck bed cover (the “**Product**”). RealTruck Enterprise, Inc. (“**Warrantor**”) is proud to have you as a customer and hopes you will be pleased with the years of service your Product provides. Please take a few moments to review the below warranty information, and be sure to complete the online warranty registration for your convenience in receiving warranty service, future promotions, and new product information.

The warranty contained on the information sheet accompanying the Product establishes the warranty terms applicable to the Product, and controls over any additional, different, or inconsistent terms that may be found on other products or on the RealTruck website.

THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

Warranty Beneficiary

This warranty extends to the original purchaser of the Product warranted under this warranty (the “**Consumer**”). It does not extend to any subsequent owner or other transferee of the Product.

Warranty Coverage

This warranty covers the Product and each of its component parts, and warrants that they will be free from failure due to defects in materials or workmanship.

Warranty Duration

The term of this warranty begins on the date Product is purchased by the original purchaser or, if purchased other than in person, on the date Product is delivered to the original purchaser, and continues, as to each of the component parts listed below, for the following durations:

● Vinyl Material	10 Year
● Hardware (Clamps, Handles, Hinge Assemblies, Bracket Kits)	10 Year
● Rails and Crossbows	10 Year

The warranty duration is not extended by repair or replacement of the Product. Warrantor may change the availability or duration of this warranty at Warrantor’s discretion, but any subsequent changes will not be retroactive or apply to your Product.

Warranty Exclusions and Limitations

This warranty does not cover damage caused by misuse, abuse, or accident such as: neglect, lack of maintenance, care inconsistent with care instructions, normal wear and tear, vehicle alterations or additions (other than by an authorized RealTruck dealer or under direction of Warrantor), unauthorized repair, transportation, collision, off-road driving, use in competitive racing, vibrations from worn or altered suspension systems or sound equipment, and/or acts of nature including but not limited to tornados, hurricanes, hail, and earthquakes.

THERE ARE NO OTHER PRODUCT WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, WHICH EXTEND BEYOND THE ABOVE WARRANTY DURATIONS. SUCH WARRANTIES ARE DISCLAIMED. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY ON THIS PRODUCT, THE CONSUMER IS LIMITED TO THE FOLLOWING RELIEF, AT WARRANTOR’S ELECTION: REPAIR, REPLACEMENT OF DEFECTIVE PART(S) BY AN AUTHORIZED REALTRUCK DEALER OR UNDER DIRECTION OF WARRANTOR, OR REFUND. WARRANTOR RESERVES THE RIGHT TO REPLACE ANY PART(S) WITH CURRENT PRODUCTION PART(S) OF EQUAL OR GREATER QUALITY AND VALUE.

WARRANTOR’S LIABILITY SHALL UNDER NO CIRCUMSTANCES EXCEED THE ACTUAL COST OF REPAIRING OR REPLACING THE DEFECTIVE PART(S), NOR SHALL WARRANTOR UNDER ANY CIRCUMSTANCES BE LIABLE FOR ANY CONSEQUENTIAL, INCIDENTAL, SPECIAL, OR PUNITIVE DAMAGES OR LOSSES, WHETHER DIRECT OR INDIRECT.

SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

Warranty Process

In-Store and Dealer Purchases: To seek warranty service for Products purchased in-store or through an authorized RealTruck dealer, Consumer may return the Product to the authorized RealTruck dealer from which Consumer purchased the Product. Consumer must present personal identification and proof of purchase of the Product. The authorized RealTruck dealer is responsible for processing Consumer warranty claims and coordinating with RealTruck regarding warranty service. If Consumer is unable to return the Product to the original authorized RealTruck dealer, Consumer may visit <https://realtruck.com/warranty-policies/> to contact RealTruck directly regarding warranty service.

Online Purchases: To seek warranty service for Products purchased online through www.realtruck.com, or Products purchased online through an authorized online retailer after the authorized online retailer's return period, Consumer must visit www.realtruck.com/warranty-policies/ and contact RealTruck using the "SUBMIT WARRANTY CLAIM" link. Consumer must provide proof of purchase of the Product.

Contact Us

If you have questions about this warranty, contact RealTruck online at <https://realtruck.com/contact-us/>, by phone at (866) 519-0675, or by mail at 5400 Data Court, Ann Arbor, MI 48108.

**REGISTER
YOUR
WARRANTY
ONLINE**

