I - Sheet Number INS-HS31 Rev.D



#### **Hood Shield**

For proper installation and best possible fit, please read all instructions BEFORE you begin. For technical assistance or to obtain missing parts, please call Customer Relations at 1-800-344-8759.

### **Important Safety Information**



- CAUTION Before driving, ensure that the hood shield is properly secured to vehicle.
- Do not use automatic "brush-style" car washes.
- Do not use cleaning solvents of any kind.
- Periodically check all components for tightness.

#### **Contents**

**NOTE:** Actual product may vary from illustration.



Hood shield



Bump On x4



Fastener

## **Tools Required**



Car Wash Supplies



Clean Towel



Phillips screwdriver



Flathead screwdriver

# **Preparation Before Painting / Installation**

- A trial fit is recommended to ensure proper positioning and fit.
- Check fit of parts before painting as we will not accept the return of modified or painted parts.
- Wash and dry your vehicle to remove any debris and/or dirt from the installation area.

### **Installation Steps**


**NOTE:** Actual application may vary slightly from illustrations.



Open hood. Locate (4) fasteners that attach the rubber seal to the underside of the hood. Remove and discard ALL FOUR. **NOTE:** On 2017 and up Nissan Rogue **ONLY** a small slit must be cut in the weatherstrip at the two OUTBOARD locations in order to access the factory fasteners.




OUTBOARD Fastener location



OUTBOARD Fastener location



1

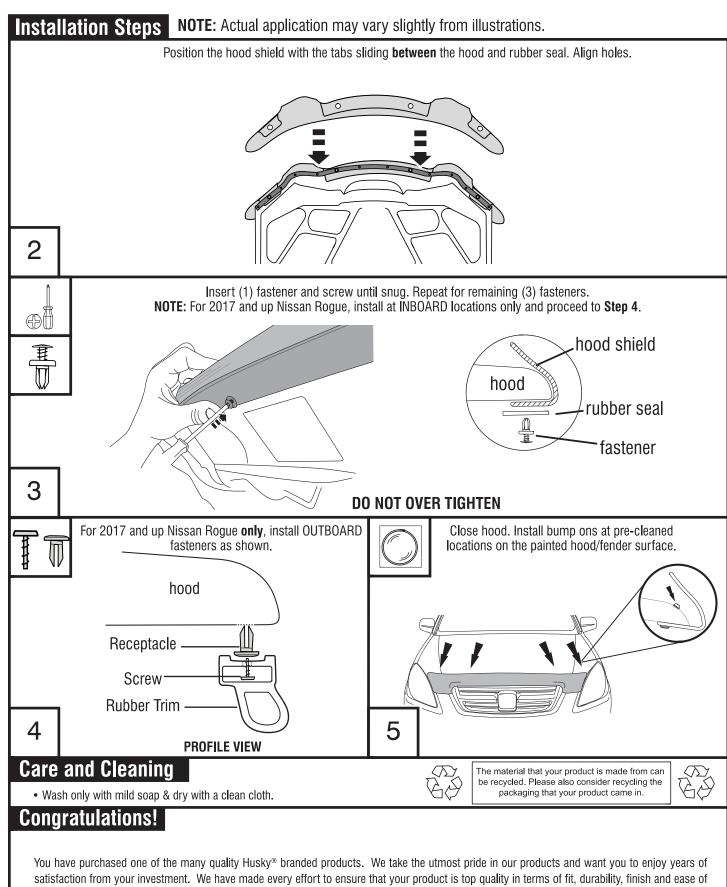

installation.

1-800-344-8759 • Visit us at huskyliners.com © 2024 Husky Liners, Inc. All rights reserved. Husky® and the Husky® logo are trademarks of Husky Liners, Inc.