



2026+ Subaru Forester Wilderness Installation Instructions

















Manufacturer warranty covers material defects on new, never installed parts. Once installed, customer is responsible for all replacement part costs. Caution against blind spots during parking. Avoid curbs and excessive compression to flaps. **Check for sufficient exhaust, wheel, suspension clearances.**

INSTALLATION QUESTION? FOR REPLACEMENT PART QUOTES, SEND FLAP RECEIPT OR PHOTO → www.rallyarmor.com/support

Recommended Tools Low-profile offset, ratcheting, flat & Phillips screwdrivers, 10mm & 11mm wrenches, pick.

ONLY install on even surface using hand tools, not powered tools. AVOID OVERTIGHTENING HARDWARE.

ABOUT OUR STANDARD IN MUD FLAPS Polyurethane is a high grade plastic that may feature minor surface layer marks. These are visual variations that don't affect flap construction or performance. Most matte away as the material ages over time.

CONFIRM PARTS & QUANTITIES BEFORE INSTALLATION			
MUD FLAP KIT PN MF152 SEE PAGE 4		PART DESCRIPTION	QUANTITY
MF132-LF		LEFT FRONT	1
MF132-RF		RIGHT FRONT	1
MF152-LR		LEFT REAR	1
MF152-RR		RIGHT REAR	1
BRACKET KIT PN BMF152			
BMF132-1		BRACKET FRONT	2
BMF118-RE2		BRACKET FRONT 2	2
BMF106-LR		BRACKET LEFT REAR	1
BMF106-RR		BRACKET RIGHT REAR	1
HARDWARE KIT PN HMF152			
1SS		SCREW	8
1SS#8		THIN SCREW	2
15TAB		TAB	2
BLKNUT		NUT	2
EXPANCH		EXPANSION ANCHOR	2
HXBLT		BOLT	2
RACLP		CLIP	2
SMWASH		WASHER	16
SSLNUT		LOCK NUT	2
UNUT2		CLIP	8



2026+ Subaru Forester Wilderness Installation Instructions

Do not fully tighten fasteners until mud flaps are completely aligned to vehicle.

FRONT FLAP To access interior wheel well, turn steering wheel towards installation side.

Parts x 1 Flap → 1 x BMF118-RE2; 1 x BMF132-1; 2 x 1SS; 1 x 1SS#8; 1 x BLKNUT; 1 x EXPANCH; 1 x HXBLT;
 5 x SMWASH; 2 x UNUT2

IMAGE A/B Uninstall fasteners 1 – 3. Move liner aside. Install UNUT2 over mounts 1 & 2. Replace liner.


IMAGE C Fold EXPANCH, then install into mount 3. Expand EXPANCH using pick in the center of mount.



IMAGE D Place long leg of BMF118-RE2 over EXPANCH mount 3, then install SMWASH & 1SS#8.

IMAGE E Position BMF132-1 over flap-side facing tire mounts 1, 2 & 4. Install SMWASH & 1SS into mounts 1 & 2. Install SMWASH & HXBLT into mount 4 and SMWASH & BLKNUT onto its reverse side.

IMAGE F Ensure flap is aligned to vehicle before hand-tightening washers just until flush to flap.

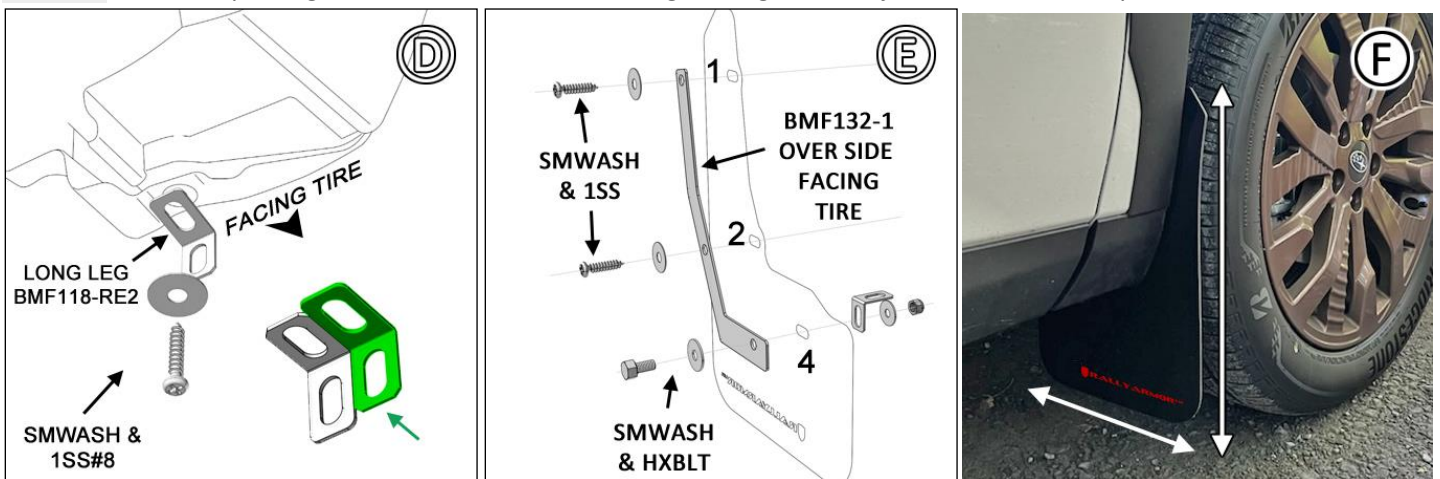



2026+ Subaru Forester Wilderness Installation Instructions

REAR FLAP Parts x 1 Flap → 1 x BMF106-LR/RR; 2 x 1SS; 1 x 15TAB; 1 x RACLP; 3 x SMWASH; 1 x SSLNUT; 2 x UNUT2

IMAGE G Uninstall fasteners 1 & 2. Temporarily remove underbody fastener 3.

IMAGE H Install UNUT2 **UNDER** mount 1 & **OVER** mount 2.

IMAGE I Place stud-side of BMF106-LR/RR facing tire & hole-side over mount 3, then reinstall fastener 3.

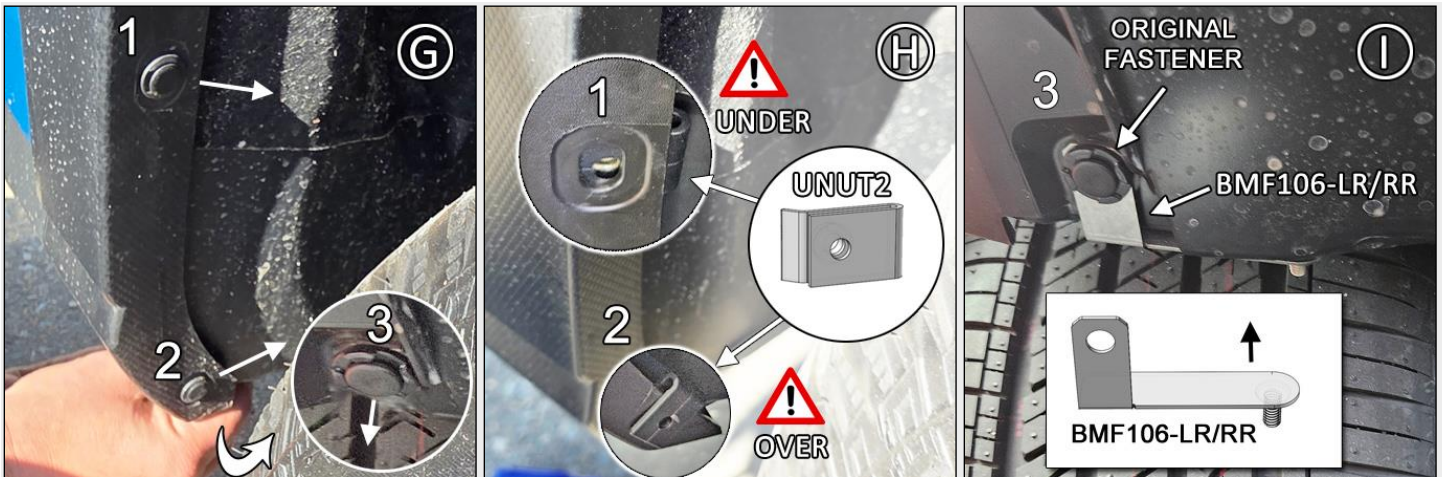


IMAGE J Place logo-side of flap facing rear bumper. Loosely install SMWASH & 1SS into mounts 1 & 2 and SMWASH & SSLNUT into mount 3.

IMAGE K Adjust slotted flap to preferred width coverage prior to identifying location to mount RACLP. Wipe underbody fender flare prior to adhering 15TAB **behind** flare. 15TAB adhesive side faces tire. Install RACLP **over** flap, 15TAB & flare.

IMAGE L Ensure flap is aligned to vehicle before hand-tightening washers just until flush to flap.



IMF152



2026+ Subaru Forester Wilderness Installation Instructions

MF152 MOUNTING DIAGRAM

