


— PROPRIETARY —
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	RELEASED TO PRODUCTION	Sep-05-23	TC/BS
ALL	B	REMOVED: 002-05-020; ADDED: 002-00-000-A, 029-20-137 AND 029-03-226-A	2025-02-13	NL/BS

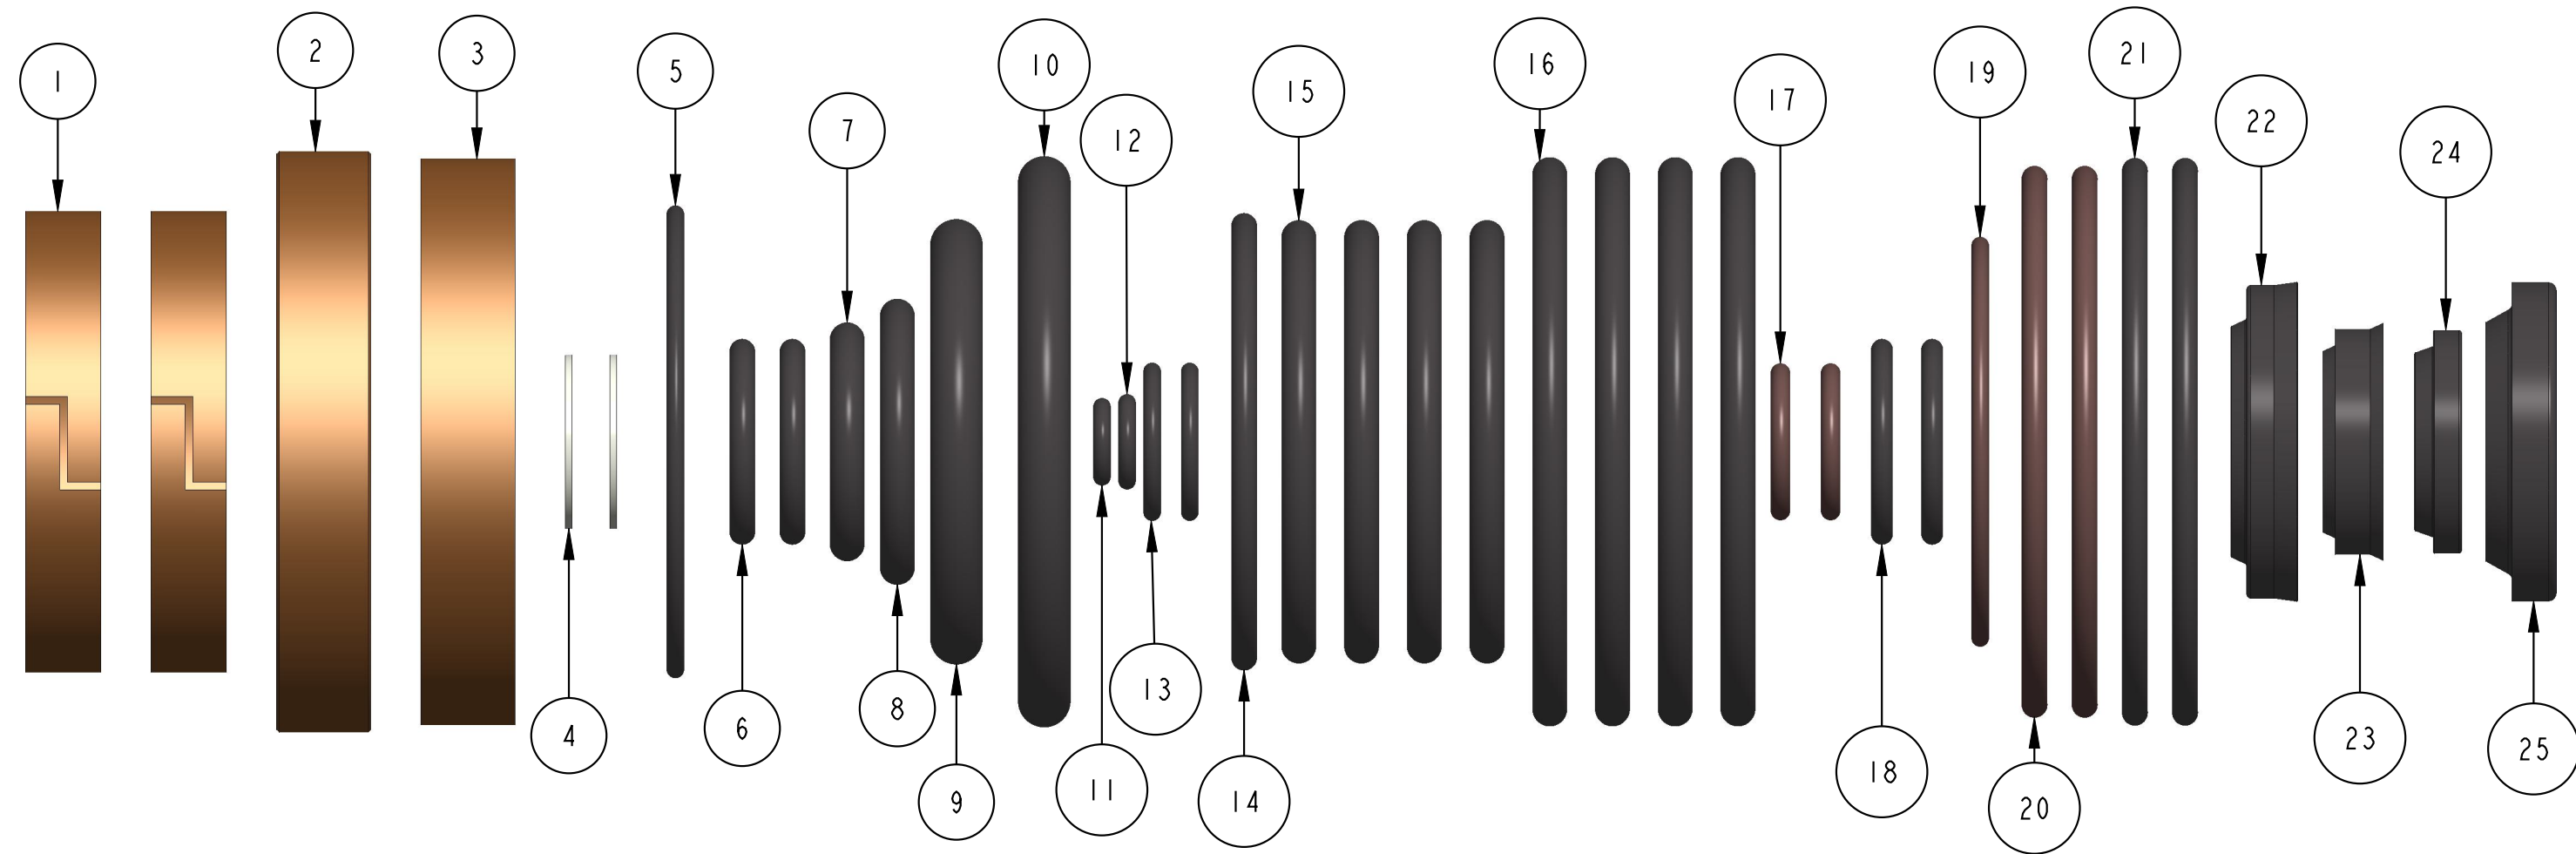

ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	002-00-000-A	Bearing: External [0.300 W X 5.830 TLG X 0.050 TH, Ø 1.834 Bore]
2	1	002-00-029	Bearing: External [0.375 W X 7.020 TLG X 0.050 TH, Ø 2.310 Bore] Turcite 47, Ste
3	1	002-00-030	Bearing: External [.375 W X 7.16 TLG X .050 TH, 2.250 Bore]
4	2	018-05-052	Fastener, Standard: Washer [.500 ID X .690 OD X .032 TH] PTFE
5	1	029-00-031	Seals:O-Ring [(-031) .070 C.S. X 1.739 ID] Standard N674-70, Dynamic
6	2	029-00-114	Seals:O-Ring [(-114) .103 C.S. X .612 ID] Standard N674-70, Dynamic
7	1	029-00-209	Seals:O-Ring [(-209) .139 C.S. X 0.671 ID] Standard N674-70, Dynamic
8	1	029-00-212	Seals:O-Ring [(-212) .139 C.S. X .859 ID] Standard N674-70, Dynamic
9	1	029-00-324	Seals:O-Ring [(-324) .210 C.S. X 1.350 ID] Standard N674-70, Dynamic
10	1	029-00-328	Seals:O-Ring [(-328) .210 C.S. X 1.850 ID] Standard N674-70, Dynamic
11	1	029-03-009-A	Seals:O-Ring [(-009) .070 C.S. X .208 ID] Standard N-70 Static
12	1	029-03-010-A	Seals:O-Ring [(-010) .070 C.S. X .239 ID] Standard, N-70, Static
13	2	029-03-014	Seals:O-Ring [(-014) .070 C.S. X 0.489 ID] Standard, N-70, Static
14	1	029-03-130-A	Seals:O-Ring [(-130) .103 C.S. X 1.612 ID] Standard, N-70, Static
15	4	029-03-222-A	Seals:O-Ring [(-222) .139 C.S. X 1.484 ID] Standard, N-70, Static
16	4	029-03-226-A	Seals:O-Ring [(-226) .139 C.S. X 1.984 ID] Standard, N-70, Static
17	2	029-04-906	Seals:O-Ring [(-906) .078 C.S. X .468 ID] Viton 75 Durometer, Hose Fitting
18	2	029-11-908	Seals: O-Ring [(-908) .087 C.S. X .644 ID] Buna 90A -8 Hose Fitting
19	1	029-18-029	Seals: O-Ring [(-029) .070 C.S. X 1.489 ID] Viton, 90 Durometer
20	2	029-18-136	Seals: O-Ring [(-136) .103 C.S. X 1.987 ID] Viton 90 Durometer
21	2	029-20-137	Seals: O-Ring [(-137) .103 C.S. X 2.050 ID] Trelleborg, N7083, 70 Durometer
22	1	036-01-002-A	Seals: U-cup, H [Ø 0.875 Shaft] 4181 Nitrile durometer 70
23	1	036-01-008-A	Seals: U-cup, H [Ø 0.620 Shaft] 4300 Urethane, AY
24	1	036-02-002-A	Seals: Wiper Seal [Ø 0.625 Shaft] Parker SHD
25	1	036-02-003-A	Seals: Wiper, D [Ø 0.875 Shaft] 4611 Urethane durometer A 90

FAMILY TABLE	
PART NUMBER	DESCRIPTION
803-04-034-M	MAKE KIT
803-04-034	BUY KIT

NOTES:
 1. APPLICATION REFERENCE: Kit: Rebuild, 2.0/2.5 PES [Ø 0.625/0.875" Shaft, Ø 2.0/2.5 Reservoir] Std Temp

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN: INCHES [MM]		PER ASME Y14.5-2018		FOX FACTORY, INC.	
DEV PROJECT #: N/A		APPROVALS		TITLE	
TOLERANCES ARE:		DWN. BY T CARLISLE		KIT: REBUILD, 2.0/2.5 PES	
DECIMALS .XX [.X] ±.01 [0.25]		DATE Sep-05-23		[Ø 0.625/0.875" SHAFT, Ø 2.0/2.5 RESERVOIR]	
ANGLES ± 1°		CHK. BY B SMITH		STD TEMP	
THIRD ANGLE PROJECTION		ENG. T CARLISLE		SIZE C	
		MFG.		DWG. NO. 803-04-034-X	
		OC.		PLOT SCALE: 1.500	
				SHEET: 1 OF 1	