


— PROPRIETARY —
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	RELEASED TO PRODUCTION	Sep-05-23	TC/BS

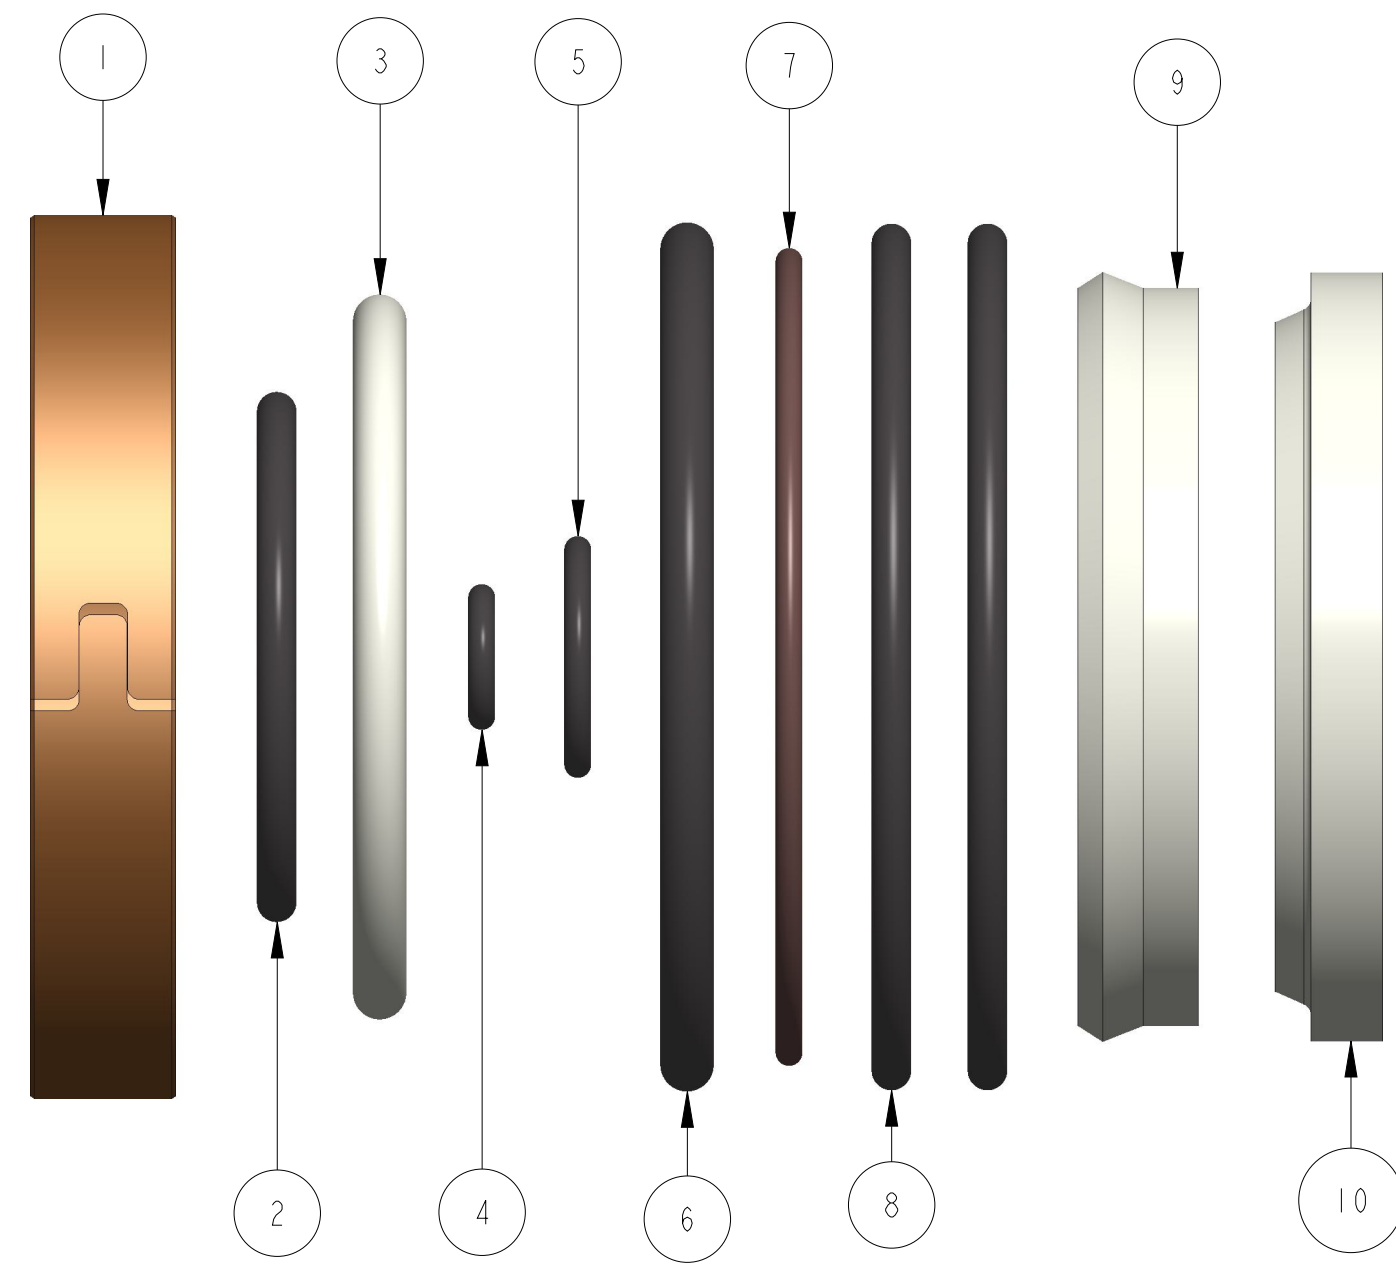

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	002-02-055	Bearing: External [.375 W X 2.250 OD X .050 TH, 2.250 Bore] PTFE Bronze
2	1	029-00-123	Seals:O-Ring [(-123) .103 C.S. X 1.174 ID] Standard, N674-70 , Dynamic
3	1	029-02-223-B	Seals:O-Ring [(-223) .139 C.S. X 1.609 ID] Polyurethane, 70 Durometer
4	1	029-03-010-A	Seals:O-Ring [(-010) .070 C.S. X .239 ID] Standard, N-70, Static
5	1	029-03-014	Seals:O-Ring [(-014) .070 C.S. X 0.489 ID] Standard , N-70, Static
6	1	029-03-226-A	Seals:O-Ring [(-226) .139 C.S. X 1.984 ID] Standard, N-70, Static
7	1	029-18-033	Seals:O-Ring [(-033) .070 C.S. X 1.989 ID] Viton, 90 Durometer
8	2	029-20-137	Seals: O-Ring [(-137) .103 C.S. X 2.050 ID] Trelleborg, N7083, 70 Durometer
9	1	036-01-021-A	Seals: U-Cup [Ø 1.625 Shaft] Urethane durometer 92
10	1	036-02-023-A	Seals: Wiper, D [Ø 1.625 Shaft] Urethane durometer 92, SPL

FAMILY TABLE	
PART NUMBER	DESCRIPTION
803-04-039-M	MAKE KIT
803-04-039	BUY KIT

NOTES:
 1. APPLICATION REFERENCE: Kit: Rebuild, 2.5 FRS A/S [Ø 1.625" Shaft, Emu] Std Temp

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN: INCHES [MM]		PER ASME Y14.5-2018		FOX FOX FACTORY, INC.	
DEV PROJECT #: N/A		APPROVALS		TITLE	
TOLERANCES ARE: DECIMALS .XX [.X] ±.01 [0.25] .XXX [.XX] ±.005 [0.13]		DWN. BY T CARLISLE		Sep-05-23	
THIRD ANGLE PROJECTION		CHK. BY B SMITH		Sep-05-23	
		ENG. T CARLISLE		Sep-05-23	
		MFG.		SIZE C	
		QC.		DWG. NO. 803-04-039-X	
				PLOT SCALE: 2.000	
				SHEET: 1 OF 1	